




Automatic Rescue Device

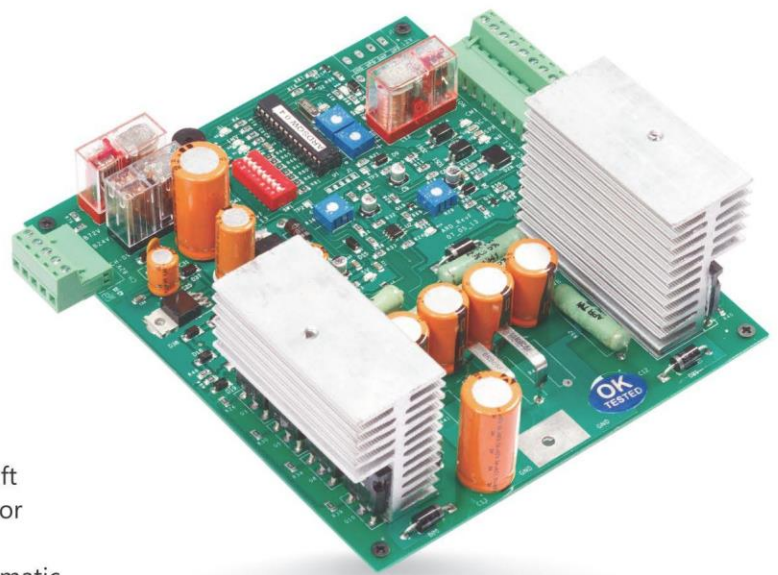

Feature :

- In case of a main power supply failure, the lift stopped between two floors is moved to floor level, the automatic door is opened and passengers are out safely, For lifts with automatic door, in case of a main power supply failure at floor level, the door is remain opened ,

Technical Specification:

- Input Voltage: Three Phase 440VAC, 50Hz Pure Sine Wave Main Line Voltage
- Output Voltage: Two Phase 440VAC, 50Hz Modified Square wave and pure Sine Wave output option available.
- Battery Voltage: 72V (6 Battery of 12V) and Amp depend upon the Motor Rating

Technical Specification:

- This device is suitable for those buildings without an emergency power source Allocated for the elevator.
- Also have smart Battery Charger for 72V (6 Battery of 12V) For Higher HP Motor they have also Current Sensor which detect the lowest current direction of the motor, this is optional.
- Overload and Overcurrent Protection. Start Time and Travel Time Also Adjustable.